



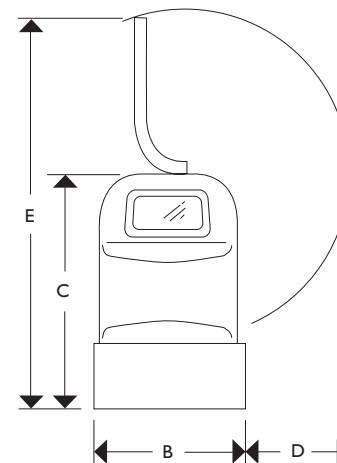

JCB GENERATOR G17Q | SOUND ATTENUATED



RATED POWER

Generator model	Hz	Phase	Prime	Standby
			G17Q	G17Q
220 – 240V	50	Single	12.3kVA / 12.3kW	13.0kVA / 13.0kW
220/110v	60	Single	13.8kVA / 13.8kW	14.7kVA / 14.7kW
380 – 415v	50	Three	15.0kVA / 12.0kW	16.5kVA / 13.2kW
220 – 127v	60	Three	16.9kVA / 13.5kW	18.8kVA / 15.0kW

Rating at 1.0pf single phase

Rating at 0.8pf three phase

Prime – This rating is for the supply of continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation on the annual hours of operation and 10% overload power can be supplied for one hour in twelve hours.

Standby – This rating is for the supply of continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted.

DIMENSIONS

	mm (in)
A Length	1600 (63)
B Width	720 (28.3)
C Height	1200 (47.2)
D Max. horizontal projection of open door	550 (21.7)
E Max. total height of open door	1970 (77.6)

WEIGHTS

Dry weight (with lube oil)	kg (lb)	550 (1210)
Wet weight (with lube oil and coolant)	kg (lb)	575 (1265)

JCB GENERATOR G17Q | SOUND ATTENUATED



SPECIFICATIONS

Engine	Deutz D2009L03		
Number of cylinders	3 in-line		
Cubic capacity	litres (cu inch)	1.72 (105)	
Aspiration	Turbocharged		
Alternator	Newage Stamford		
Frequency	Hz	50	60
Engine speed	rpm	1500	1800
Fuel tank capacity	litre (US gal)	100 (26.4)	100 (26.4)
Fuel consumption at full rating: Prime	litre/h (US gal/h)	4.04 (1.06)	4.70 (1.24)
Fuel consumption at full rating: Standby	litre/h (US gal/h)	4.15 (1.10)	5.41 (1.43)
Heat rejection to exhaust system (max)	kW (BTU/min)	13.8 (784)	15.2 (864)
Heat rejection to cooling system (max)	kW (BTU/min)	10.7 (608)	13 (739)
Total radiated heat (max)	kW (BTU/min)	7.3 (415)	10.2 (580)
Exhaust temperature (max)	deg C (deg F)	482 (899)	564 (1047)
Radiator cooling flow	cu m/min (cfm)	4.5 (160)	8.8 (309)
with max. restriction	mm (in) H.O	15 (0.60)	15 (0.60)
Combustion air flow max	cu m/min (cfm)	1.06 (37)	1.29 (46)
Exhaust gas flow (max)	cu m/min (cfm)	2.74 (97)	3.68 (129)
with max allowable back pressure	mm (in) H.O	203 (8)	305 (12)

SOUND PRESSURE LEVELS

		50Hz, 1500rpm	60Hz, 1800rpm
15m, 75% load	dB(A)	60.0	62.0
15m, 100% load	dB(A)	60.0	62.0
7m, 75% load	dB(A)	66.0	68.0
7m, 100% load	dB(A)	66.0	68.0
1m, 75% load	dB(A)	77.0	79.0
1m, 100% load	dB(A)	77.0	79.0

Note: Standard reference conditions: 25 deg C (77 deg F) air inlet temperature, 152.4m (500 feet) above sea level, 60% relative humidity. All engine performance data based on the above mentioned maximum continuous ratings. Fuel consumption data at full load for diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, class A2. Not UL approved.



FEATURES

		Options
Control System	Emergency Lock Down Button	•
	Digital Control Panel	•
	Events Recorder	•
	Maintenance Call	•
Engine	Wiring Loom	•
	Mechanical Speed Governor	•
	Coolant Drain Piped To Side	•
	Lubricant Oil Drain Sump Valve	•
Alternator	Low Lube Oil Pressure (Shutdown)	•
	Newage Stamford	•
	Class H Insulation	•
Radiator	SX460 AVR (Self Excited)	•
	50 degC Ambient Capacity	•
	Coolant Solution With 30% Antifreeze	•
Base Frame / Handling	High Coolant Temperature (Shutdown)	•
	Polyester Powder Coated Baseframe With Earth Stud	•
	Vibration Isolators between Generator & Baseframe	•
	4 Lifting Eyes Fitted To Baseframe	•
Q Versions (Canopy)	Heavy Duty Galvanised Sheet Steel	•
	Lubricant Oil Drain Piped To Side (+ Valve)	•
	Residential Silencer	•
Fuel	Stainless Steel Bellows	•
	Fuel / Water Separator	•
	Fuel Tank Level Gauge	•
AC Power Output	3 Pole Circuit Breaker	•
	Battery	•
	Battery Rack & Cables	•
Other	12v or 24v Lead Acid Heavy Duty Battery	•
	Low Battery Voltage (Advance Warning)	•
	Battery Charging System Failure (Advance Warning)	•
Other	CE Certification	•
	Operators Manual	•

JCB cares for the environment. This paper has been produced without the use of elemental chlorine chemicals in the bleaching process.

JCB Power Systems Ltd., Dove Valley Park, Foston, Derby DE65 5BX. Tel: 00 44 1283 584250. www.jcbpowersystems.com

JCB reserves the right to change specifications without notice. Illustrations shown may include optional equipment and accessories. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.



A Product of Hard Work